


120 X 120 X 25 mm

Dimensions Drawing

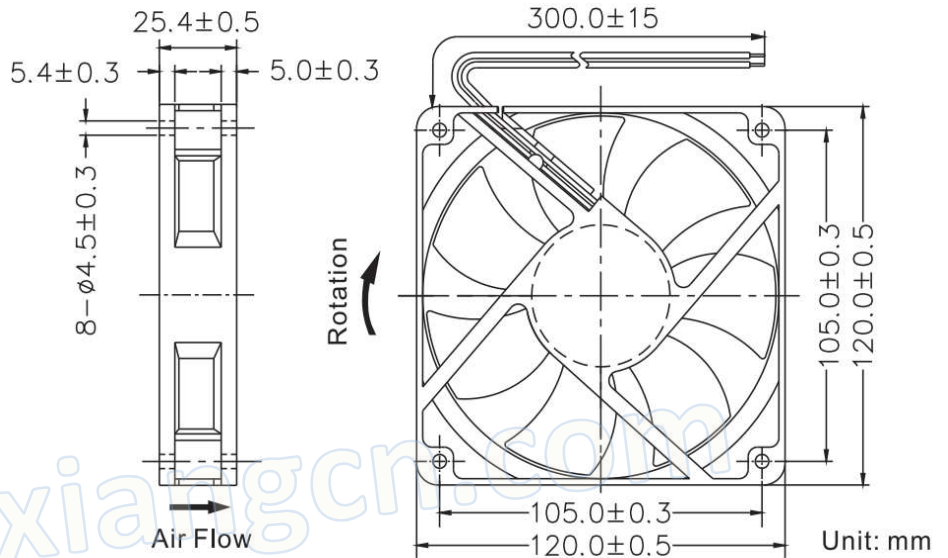

General Specification:

A、 Frame and Impeller: Thermal Plastic, UL94V-0

B、 Lead Wires: UL Tlype


(+): Red (-): Black

C、 Operation Temperature: -10°C ~ 70°C

35% ~ 85RH

D、 Storage Temperature: -40°C ~ 80°C

35% ~ 85RH

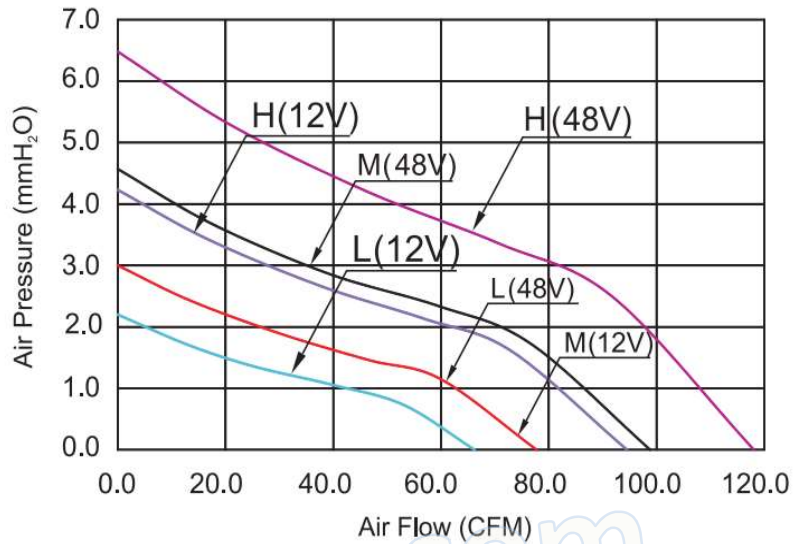

Listed Model	Bearing System	Rated Voltage	Operating Voltage	Rated Current	Input Power	Maximum Air Flow	Maximum Air Pressure	Speed	Noise	Weight
		(V)	(V)	(A)	(W)	(CFM)	(mmAq)	(rpm)	dB(A)	(g)
FDL12025S	Sleeve	12	6.0-13.8	0.18	2.16	66.20	2.20	1,700	31.0	164
FDM12025S			6.0-13.8	0.23	2.76	77.70	3.00	2,000	36.0	164
FDH12025S			6.0-13.8	0.40	4.80	94.50	4.20	2,400	41.0	164
FDL12025B	Ball		6.0-13.8	0.18	2.16	66.20	2.20	1,700	31.0	164
FDM12025B			6.0-13.8	0.23	2.76	77.70	3.00	2,000	36.0	164
FDH12025B			6.0-13.8	0.40	4.80	94.50	4.20	2,400	41.0	164
FDL12025S2	Sleeve	24	12.0-27.6	0.13	3.12	66.20	2.20	1,700	31.0	164
FDM12025S2			12.0-27.6	0.20	4.80	77.70	3.00	2,000	36.0	164
FDH12025S2			12.0-27.6	0.35	8.40	94.50	4.20	2,400	41.0	164
FDL12025B2	Ball		12.0-27.6	0.13	3.12	66.20	2.20	1,700	31.0	164
FDM12025B2			12.0-27.6	0.20	4.80	77.70	3.00	2,000	36.0	164
FDH12025B2			12.0-27.6	0.35	8.40	94.50	4.20	2,400	41.0	164